



Burners for diesel specific for industrial kitchens with power command and on/off switch.
Complete of flange and gasket for installation on boiler, nozzle, flexible pipes, line filter.

TECHNICAL DATA


MODEL		G 1/C 2001	G 2/C MAXI
Delivery	kg/h	2,0-5,0	4-9.8
Thermal power	Mcal/h	20,4-51	40,8-99,9
Thermal power	kW	23,7-59,2	47,3-116
Motor power	W	100	100
Preriscaldatore	W	-	-
Maximum absorbed power	W	335	335
Fuel	LIGHT-OIL 1.5°E a 20°C = 6.2 cSt = 35 sec Redwood N°1		
Pump pressure	10-12 bar (STANDARD CALIBRATION) Max: 15 bar		
Electrical supply	single phase 230V (-15% +10%) - 50Hz		
Level of electrical protection	IP40		
Safety time of control box	= < 1 sec.		

Distributed by:



VENTA-ENERGY, LLC 01001,
Bolshaya Vasilkovskaya st., 145/1,
Kiev, Ukraine.
www.ventaenergy.com
office@ventaenergy.com
+38 067 575 85 95
Myhal Vladyslav

OVERALL DIMENSIONS (mm)

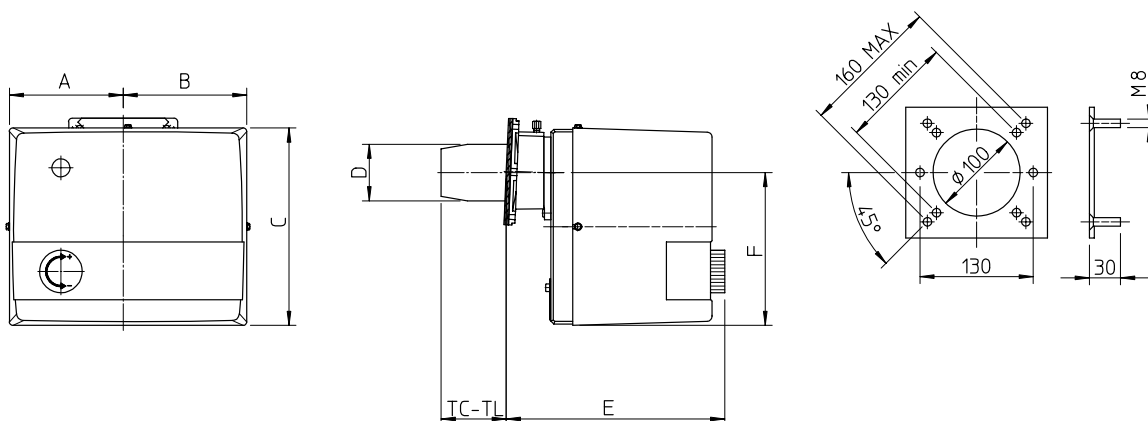

MODEL	A	B	C	D	E	F	TC	TL
G 1/C 2001	157	170	275	80	298	210	62	102
G 2/C MAXI	157	170	275	90	332	210	57	97